


INDUSTRIAL VACUUM PACKER AK-RAMON VP-700 TB 100

GENERAL CHARACTERISTICS



- Totally manufactured in AISI 304 stainless steel.
- Lid cover of AISI 304 stainless steel.
- Manual lid opening system.
- Double sealing.
- Sealing with pneumatic cylinder.
- Progressive atmosphere (Soft Air).
- Gas flushing entrance.
- Vacuum and gas control by sensor.
- Digital control panel with 99 memory programs.
- Sealing bars with pneumatic cylinders.
- Equipped with polyethylene for faster packaging and easier bag placement.
- Easy maintenance.
- Busch pump of 100 m³/h.
- Voltage : 400V/ 3ph/ 50 Hz.

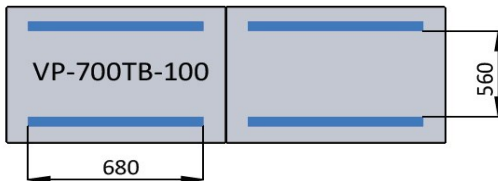


OPTIONS

- Cut of the bag.
- Independent sealing and cutting control.

TECHNICAL INFORMATION


| | VP-700 TB 100 |
|---------------------------|----------------------|
| Pump capacity | 100m ³ /h |
| Pump Power HP/Kw | 3.67/2.7 |
| Chamber dimensions (mm) | 836x680x200 |
| Packaging dimensions (mm) | 1760x900x1200 |
| Net/Gross weight (Kg) | 421x441 |

DIMENSIONS IN MM

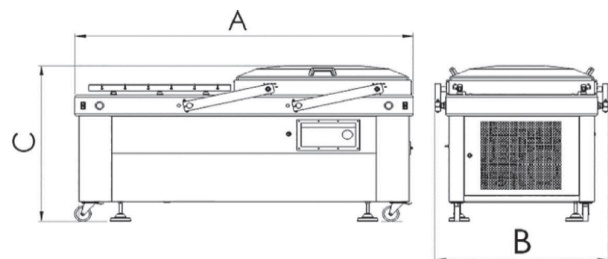


| | A | B | C |
|---------------|-------|-----|-------|
| VP-700 TB 100 | 1.590 | 710 | 1.000 |

TYPE OF SEALING

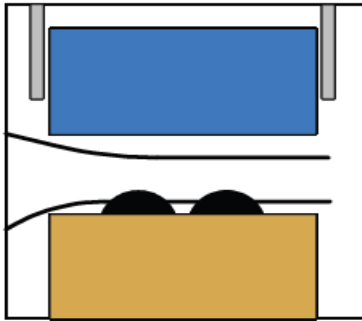


**DOUBLE
SEALING**

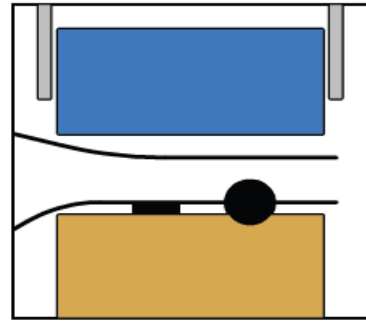

**SIMPLE
SEALING + CUT**

CONTROL PANEL

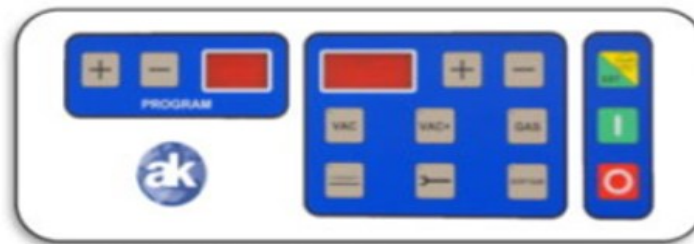

Control Panel by sensor

- Digital control panel.
- Vacuum control by sensor.
- Gas flushing entrance control by sensor.
- Sealing time regulation.
- Soft-air.
- VAC-STOP push button, finish the vacuum & continue the process.
- VAC+ push button, additional vacuum time
- Maintenance push button control.
- 99 memory positions.
- Monitoring step by step of the cycle through led.