

VACUUM PACKER STANDING AK-RAMON VP-800 AB



GENERAL CHARACTERISTICS



- Totally manufactured in stainless AISI 304 steel.
- Transparent lid.
- Double sealing.
- Progressive atmosphere (Soft Air).
- Digital control panel.
- Pneumatic sealing.
- Easy disassembly of sealing bars.
- Equipped with polyethylene for faster packaging and easier bag placement.
- Easy maintenance.
- 63 m³/h BUSCH pump.
- Voltage : 400 V/ 3ph/ 50 Hz.

OPTIONS

- Gas flushing entrance.
- Controlled by sensor.
- Cut of the bag.



ACCESSORIES

- Inclined plate for packaging products with liquids or sauces.
- Vacuum connector in external buckets.

TECHNICAL INFORMATION

	VP-800 AB
Pump capacity	63m ³ /h
Pump Power HP/Kw	2.04/1.5
Chamber dimensions (mm)	800x550x200
Packaging dimensions (mm)	1020x780x1220
Net/Gross weight (Kg)	190/245

DIMENSIONS IN MM

	A	B	C
VP-800 AB	880	650	1.030

www.akbyramon.com



C/ Rafael Riera Prats, 49
08339 Vilassar de Dalt
Barcelona - Spain
Tel. (+34) 937.531.311




VAC LINE
SEALING LINE


FOOD PROCESSING LINE



TYPES OF SEALING BARS




**DOUBLE
SEALING**



**SIMPLE
SEALING + CUT**

CONTROL PANELS

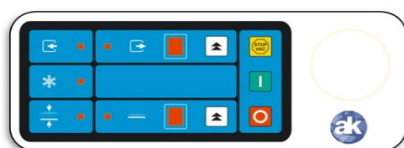


Control Panel by time and without gas

- Digital control panel.
- Vacuum controlled by time.
- Sealing time regulation.
- Soft-air.
- VAC-STOP push button, finish the vacuum & continue the process.
- Monitoring step by step of the cycle through leds.
- Vacuum gauge.



Control Panel by time and gas

- Digital control panel.
- Vacuum control by time.
- Gas flushing entrance control by time.
- Sealing time regulation.
- Soft-air.
- VAC-STOP push button, finish the vacuum & continue the process.
- Monitoring step by step the cycle through leds.
- Vacuum gauge.

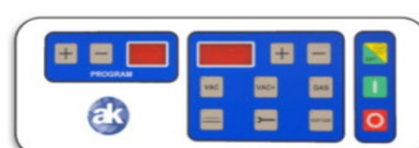

Control Panel by sensor

- Digital control panel.
- Vacuum control by sensor.
- Gas flushing entrance control by sensor.
- Sealing time regulation.
- Soft-air.
- VAC-STOP push button, finish the vacuum & continue the process.
- VAC+ push button, additional vacuum time
- Maintenance push button control.
- 99 memory positions.
- Monitoring step by step of the cycle through led.

C/RAFAEL RIERA PRATS, 49. 08339 VILASSAR DE DALT – BARCELONA -SPAIN
+34. 937.531.311

www.akbyramon.com

info@akbyramon.com